




L
Modelo

Tamanho do Corpo
100
200
300
400
500

Rosca	
M5	M5
01	1/8"
02	1/4"
03	3/8"
04	1/2"
06	3/4"
10	1"



Exemplo: L200-02
L400-06

Características Técnicas

Modelo	L100	L200	L300	L400	L500
Roscas	M5	1/8", 1/4"	3/8"	1/2", 3/4"	1"
Máx. pressão de teste (Bar)	15				
Máx. pressão (Bar)	10				
Temperatura de trabalho (°C)	-5 ~ 60 (sem congelamento)				
Óleo recomendado	Óleo de turbina classe 1 (ISO VG32)				
Vazão (L/min)	550	2500	6000	8000	

Roscas disponíveis

Código	Rosca	100	200	300	400	500
M5	M5	x	-	-	-	-
01	1/8"	-	x	-	-	-
02	1/4"	-	x	-	-	-
03	3/8"	-	-	x	-	-
04	1/2"	-	-	-	x	-
06	3/4"	-	-	-	x	-
10	1"	-	-	-	-	x




Elemento de Fixação

Modelo	Suporte
L100	SF-100
L200	SF-200
L300	SF-300
L400	SF-400
L500	SF-500




Dimensional


L100

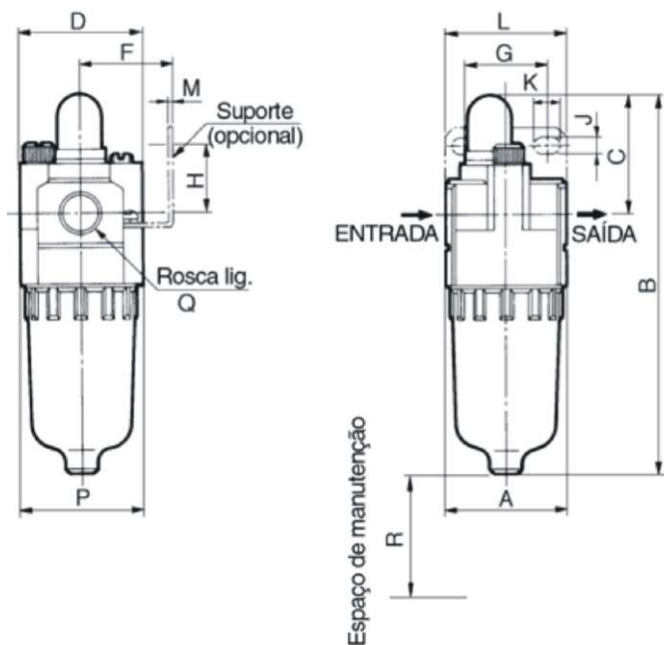

L200 / L300 / L400

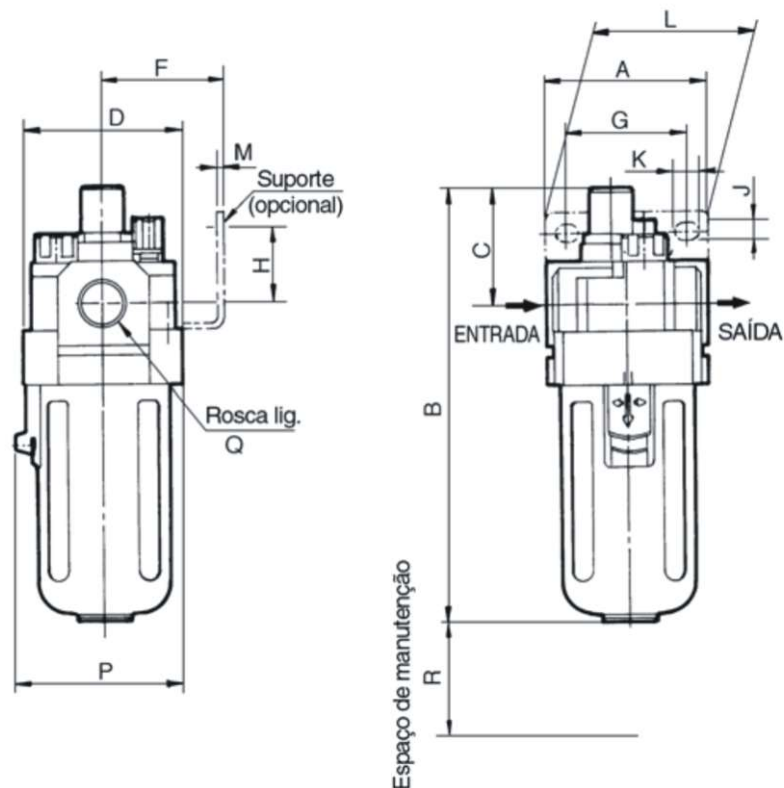

L500

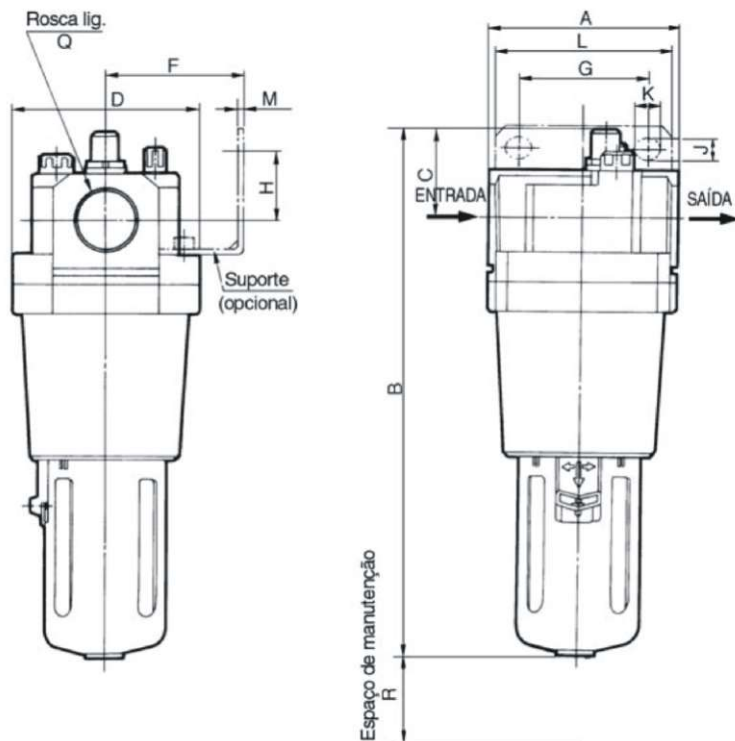

Modelo	Rosca (Q)	A	B	C	D	Dimensões com suporte							P	R
						F	G	H	J	K	L	M		
L100	M	25	81.5	25.5	25	-	-	-	-	-	-	-	27	50
L200	1/8", 1/4"	40	122	38	40	30	27	22	5.4	8.4	40	2.3	27	80
L300	3/8"	53	142	38	53	41	40	23	6.5	8	53	2.3	56	95
L400	1/2"	70	177	41	70	50	54	26	8.5	10.5	70	2.3	73	120
L400-06	3/4"	75	177	39	70	50	54	25	8.5	10.5	70	2.3	73	120
L500	1"	90	254	45	90	70	66	35	11	13	90	3.2	-	120